

Email Notification Setting – TIGERSECU 2MP&5MP DVR

To get email notifications, add **Sender** (Mail from), type in **SMTP Server**, **Port**, **User**, **Password**, **Recipient** (Mail to). (Sender and Receiver can be the same.)

Click **OK** and **Apply** after you fill in all the information.



	Gmail	Yahoo Mail	Aol Mail
SMTP Server:	smtp.gmail.com	smtp.mail.yahoo.com	smtp.aol.com
Port:	SMTP uses port 25		
	Implicit SSL/TLS encrypted SMTP uses port 465		
User:	Email address that sends the alerts.		
Password:	App password*		
Mail From:	Email address that sends the alerts.		
Mail to:	Email address that receives the alerts.		

Gmail and Yahoo settings require an **App Password**, a **16-digit passcode** that gives the DVR system permission to access your Email Account.

Follow the instructions below to generate an app password.


For Gmail:

Step 1. Turn on 2-Step verification.

① Open your web browser, log into your [Google Account](https://myaccount.google.com/).
<https://myaccount.google.com/>

② In the navigation panel, select Security.

③ Under "Signing in to Google," select **2-Step Verification. Get started**





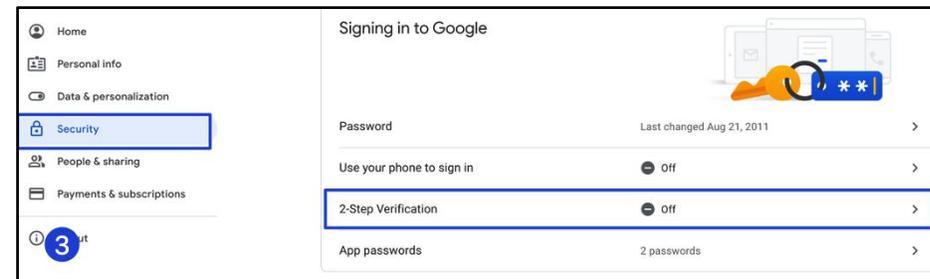


④ Enter your cellphone number and select **Text message**, then click **Next**.

⑤ Once you've received the code on your phone, enter it and click **Next**.

⑥ In the final step, click **Turn On** to enable 2-step verification on your Google Account.

Email Notification Setting – TIGERSECU 2MP&5MP DVR

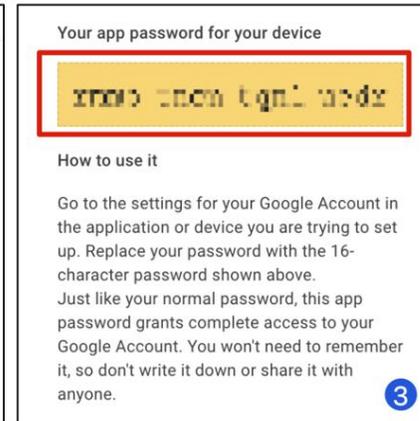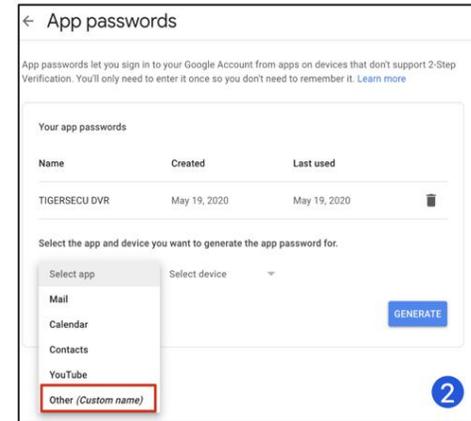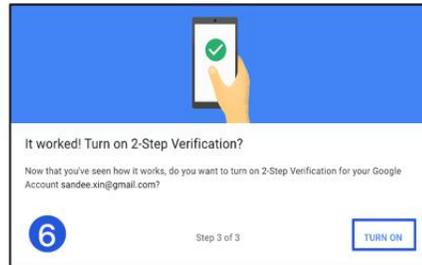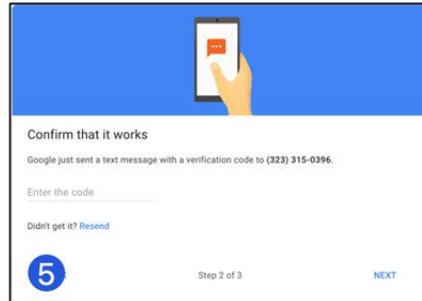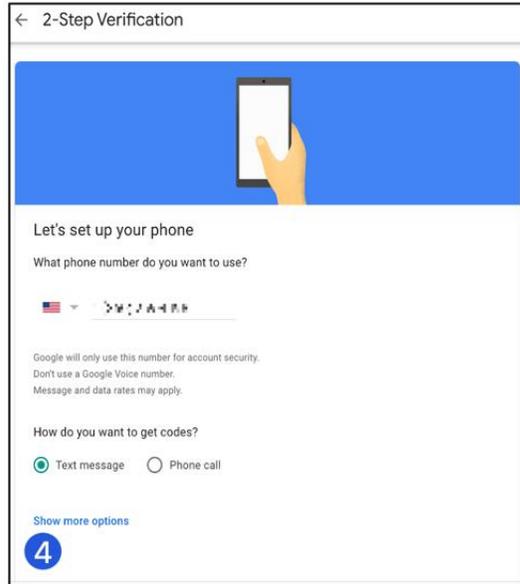

Step 2: Generate App password.

① Visit your [App passwords](#) page.

<https://security.google.com/settings/security/apppasswords>

② In the **Select app** dropdown menu, choose the app you're using. You can also select **Other** and enter TIGERSECU DVR. Click **GENERATE**.

③ Use your 16-digit app password as the password for the DVR.


Email Notification Setting – TIGERSECU 2MP&5MP DVR

For Yahoo Mail:

① Visit your Yahoo Mail security page.
<https://login.yahoo.com/account/security>


② Click "**Generate app password.**"

③ Select "**Other app.**"

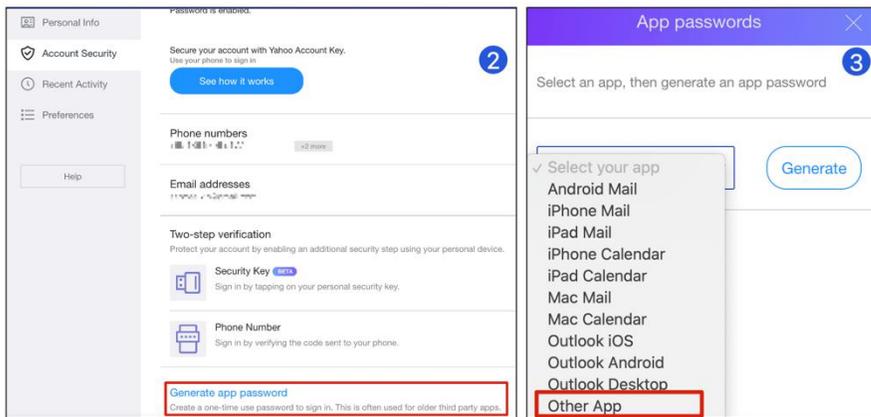

④ Enter TIGERSECU DVR.

⑤ Click **Generate** to get the 16-digit app password. Use it for your DVR.

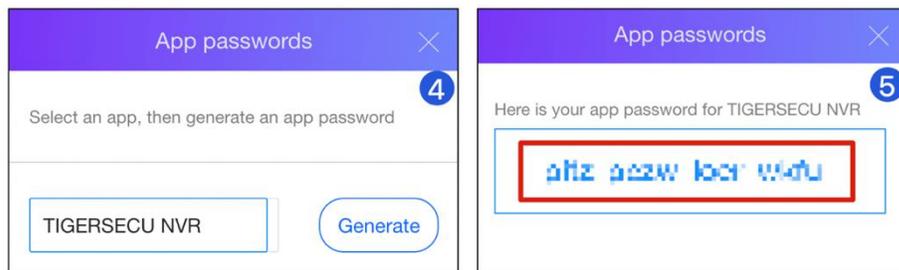


For Aol Mail:

① Visit your Yahoo Mail security page.
<https://login.aol.com/account/security>


② Click "**Generate app password.**"

③ Select "**Other app.**"

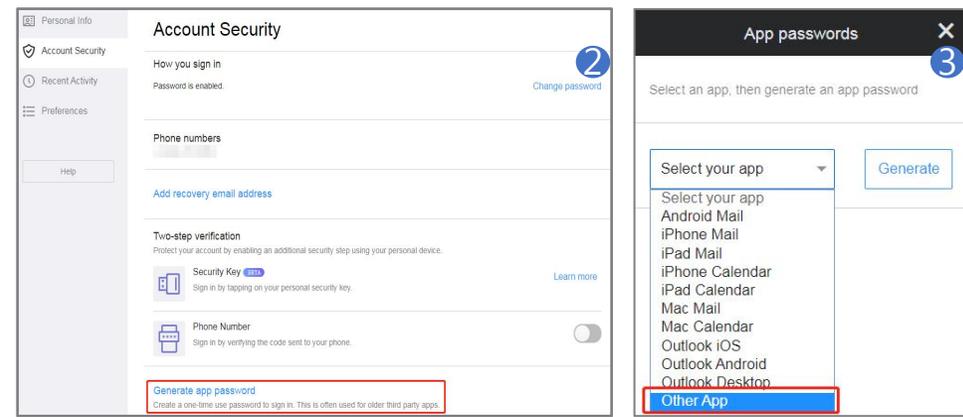

④ Enter TIGERSECU DVR.


⑤ Click **Generate** to get the 16-digit app password. Use it for your DVR.

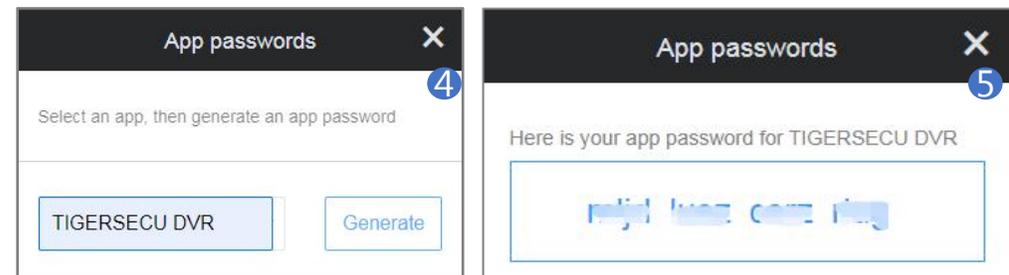

Email Notification Setting – TIGERSECU 2MP&5MP DVR

Then, click the **Test** button on the Mail setting page, you will get this setup success message.

Enable SSL
SMTP Server: smtp.mail.yahoo.com
PORT: 465
User: test@yahoo.com
Password: ●●●●●●
Mail From: test@yahoo.com
Mail to: Recipient List
Test

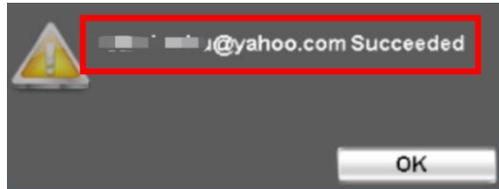

②. Choose **Enable**, then choose the recipients, Click **OK** and **Apply**.

Motion
2013/04/24 09:35:18
Video Loss
Enable
test@gmail.com
test@yahoo.com
tigersecu@gmail.com
OK Cancel
Apply to All OK Cancel Setting
Copy Default **Apply** Cancel

***Motion Trigger setting of Mail Notification.**

①. Go to **Event** menu - **Motion** - **Trigger Setting** - **Linkage Action** - **Mail to Receiver** setup.

Motion
2013/04/24 09:35:54
Video Loss
Trigger Channel Linkage Action PTZ Linking
Log
Event Record CH01
Buzzer
Relay Disable
Notification
Notification Setup...
Mail to Receiver Setup...
Apply to All OK Cancel Setting
Copy Default **Apply** Cancel